


Production Installation Manual



1. Splice the upper frames of the two fruit picking baskets.




2. Put the clamp onto the fruit picker neck.




3. Insert the top rod and make sure the bulge is in the gap.




4. Place the screw between the two adjustable clamps to secure the rod.

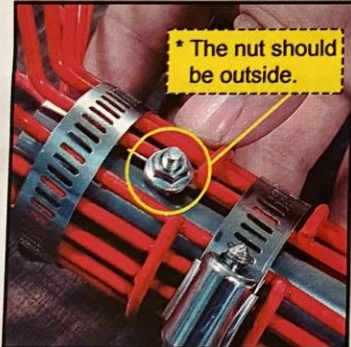


5. Tighten the nut.

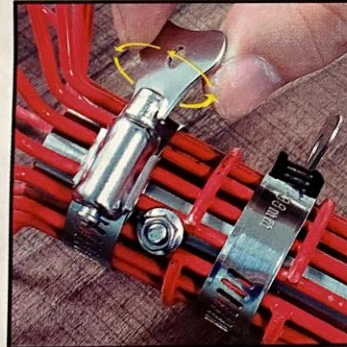

6. Tighten the bolt on the clamp up slowly.

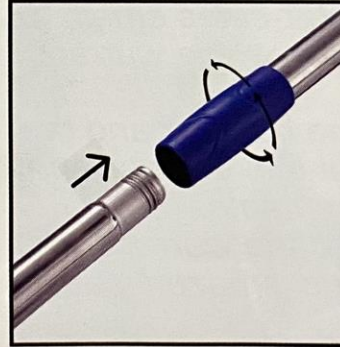

7. Put the end of pole into the other pole head. Turn the poles until tight.

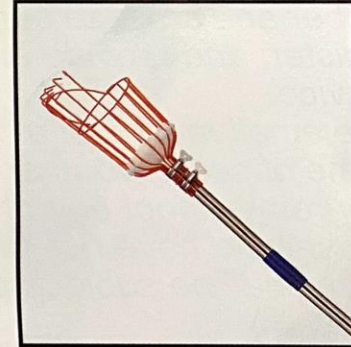

8. Finished